


NPS	L	d	NPT	L <sub>0</sub>	H	Weight (lb)
1/2"	2.165	0.551	1/2"	2.756	3.622	0.794
3/4"	2.362	0.787	3/4"	2.756	3.976	1.069
1"	2.677	0.984	1"	3.150	4.449	1.499
1 1/4"	2.992	1.260	1 1/4"	3.150	5.236	2.183
1 1/2"	3.150	1.575	1 1/2"	3.937	6.024	3.219
2"	3.662	1.967	2"	3.937	6.732	4.784
2 1/2"	4.646	2.480	2 1/2"	5.512	8.071	11.795
3"	5.433	2.835	3"	5.512	8.898	15.653

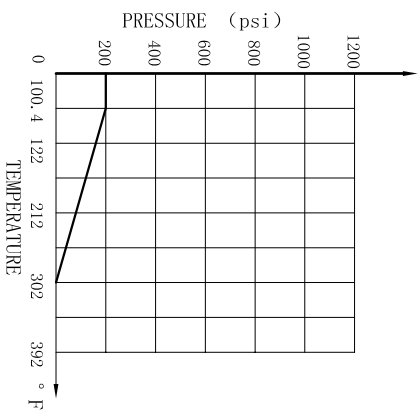

NOTE:  
 1. Design and Manufacture for valve according to ASME B16.34.  
 2. Inspection and Test for valve according to API 598.  
 3. The connection of screwed for valve according to ANSI B1.20.1.

Nominal pressure			200psi			
Test pressure	Shell test	2.1	Test medium	Water	Test temperature	Normal temperature
	Seal test	1.6		Air		
Gas seal test	0.6		Water, Oil, Gas			
Applicable medium			-20~302°F			
Applicable temperature						

13	NUT	1	A194 8
12	SPRING WASHER	1	304
11	HANDWHEEL	1	Z1101
10	BONNET NUT	1	A351 CF8
9	GLAND	1	304
8	PACKING	1	PTFE
7	BONNET	1	A351 CF8M
6	WASHER	1	A240 316
5	RING	1	A240 316
4	GASKET	1	PTFE
3	STEM	1	A276 316
2	DISC	1	A351 CF8M
1	BODY	1	A351 CF8M
NO.	DESCRIPTION	Q'TY	MATERIAL
<div style="text-align: center; font-size: 2em; font-weight: bold;">ANIX<sup>®</sup></div>		ANIX VALVE CO., LTD	
		Gate Valve 200PSI, NPT	
MARK	BEFORE MODIFIED	AFTER MODIFIED	DATE
DRAW.			
CHK.			
		SCALE	GAI1W6N/200